


CARAQUET[™] AND LANDRY[™]

KITCHEN AND BATH SERIES





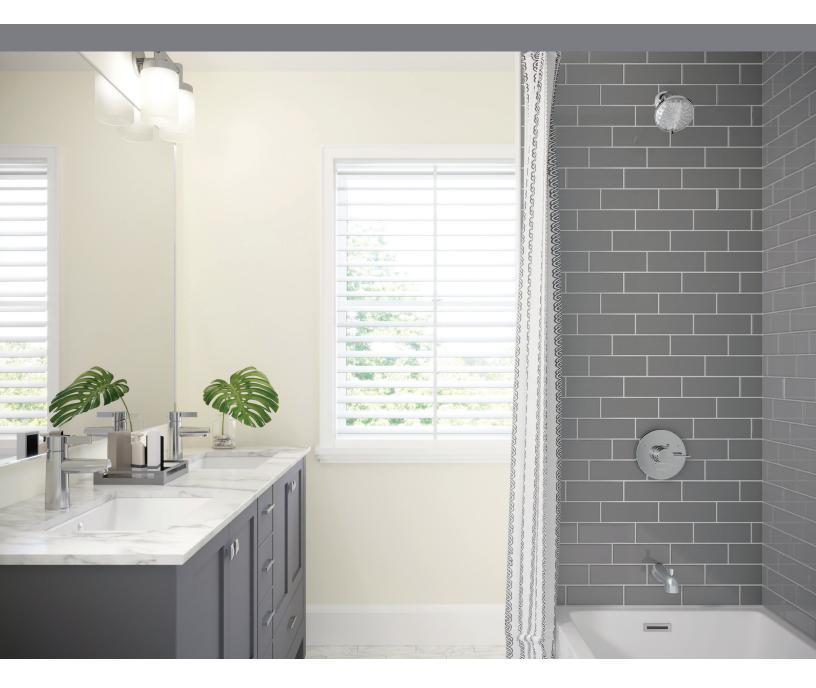










modern design with reliable performance

Lavatory faucets and showers you can truly enjoy with durable products to instill peace of mind, day after day.



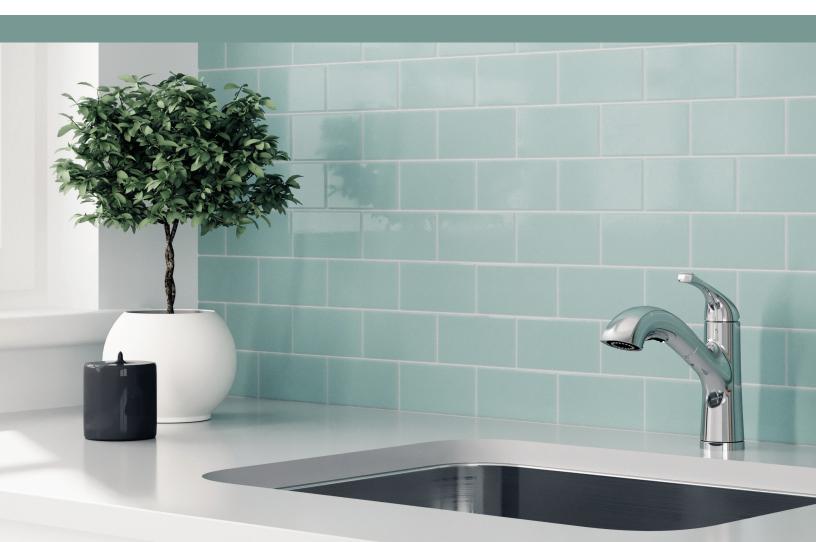







Waltec Industries takes great pride in manufacturing renowned hardware for professionals across Canada.

For over a century, Waltec has made pieces that are unparalleled in their practicality and quality. Waltec[®] products are built to last a lifetime and to also adapt in order to satisfy all unique styles, wants and needs. Fiercely reliable and deeply committed, we've earned the trust of professionals who expect high performance and consistency.

To provide quality craftsmanship at humble price points has always been at the core of our business and our values. That's why we're known as the "workhorse."

For more information, visit **waltecfaucets.ca**

KITCHEN FAUCETS



	ck Mount Kitchen			
	Model	Flow	Finish	
	W24211 Coming S	Soon	Chrome	
LANDRY ™ Escutcheon				Features
	Model	Flow	Finish	Escutcheon plate with gasket
	188C	-	Chrome	for 3-hole installation
LANDRY™	II-Out 2-Function	Sprayer Kitchen Fa	aucet	Features
LANDRY™	Model	Flow	Finish	• Maximum 1.5 gpm @ 60 psi,
LANDRY™				 Maximum 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa One or three hole mount (escutcheon # 188E optional, sold separately) Spout rotates 120° Ceramic Cartridge Two-function wand; aerated strea or spray Red/Blue indicator markings Polymer braided flexible supply
LANDRY™	Model W26214	Flow	Finish	 Maximum 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa One or three hole mount (escutcheon # 188E optional, sold separately) Spout rotates 120° Ceramic Cartridge Two-function wand; aerated strea or spray Red/Blue indicator markings



CARAQUET™

Single Handle Deck Mount Kitchen Faucet



Model W24212 G

Flow

1.5 gpm

Finish Chrome

Features

Features

• Maximum 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa
•One or three hole mount
(escutcheon # 188D optional,
sold separately)
 Spout rotates 360°
 Ceramic Cartridge
 Red/Blue indicator markings
 Polymer braided flexible supply


hose with 3/8" compression fitting


CARAQUET[™] Single Handle Pull-Down 2-Function Sprayer Kitchen Faucet

	Model W28213 �� <u></u> 도	Flow 1.5 gpm	Finish Chrome	 Maximum 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa One or three hole mount (escutcheon # 188D optional, sold separately) Spout rotates 360° Ceramic Cartridge Two-function wand; aerated stream
				 rwo rance of wand, defated stream or spray Red/Blue indicator markings Polymer braided flexible supply hose with 3/8" compression fitting
CARAQUET [™] Escutcheon				Features
(* t	Model 188D	Flow -	Finish Chrome	• Escutcheon plate with gasket for 3-hole installation

LANDRY™

Single Handle Deck Mount Lavatory Faucet

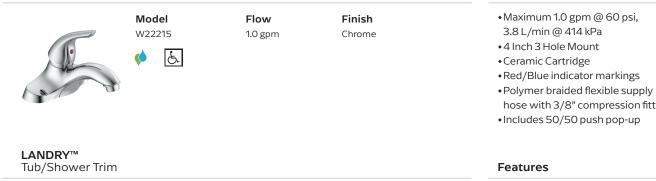

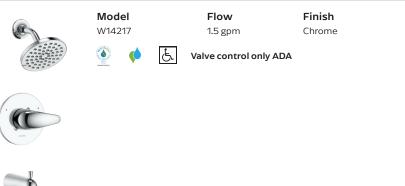

LANDRY™ Tub/Shower Trim Less Showerhead

G



Model	F
W14217-LHD	

low





Valve control only ADA

Chrome

Finish





Features

- hose with 3/8" compression fitting
- •For use with MultiChoice® Universal rough valve body (R10000 Series), must order rough separately
- Single-function pressure balance cartridge
- Temperature only controlled with handle
- Field adjustable to limit handle rotation to hot water zone
- +120° maximum handle rotation
- Red/Blue pad print temperature indicators on the temperature adjustment dial
- Slip on Spout
- Single function showerhead; 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa
- •6" spray face diameter
- Easy to clean rubber spray holes

Features

- •For use with MultiChoice® Universal rough valve body (R10000 Series), must order rough separately
- Single-function pressure balance cartridge
- Temperature only controlled with handle
- Field adjustable to limit handle rotation to hot water zone
- +120° maximum handle rotation
- Red/Blue pad print temperature indicators on the temperature adjustment dial
- •Slip on Spout
- Less Showerhead



balance cartridge


with handle

adjustment dial • Less Showerhead

Features

• Temperature only controlled

Field adjustable to limit handle rotation to hot water zone
120° maximum handle rotation
Red/Blue pad print temperature indicators on the temperature

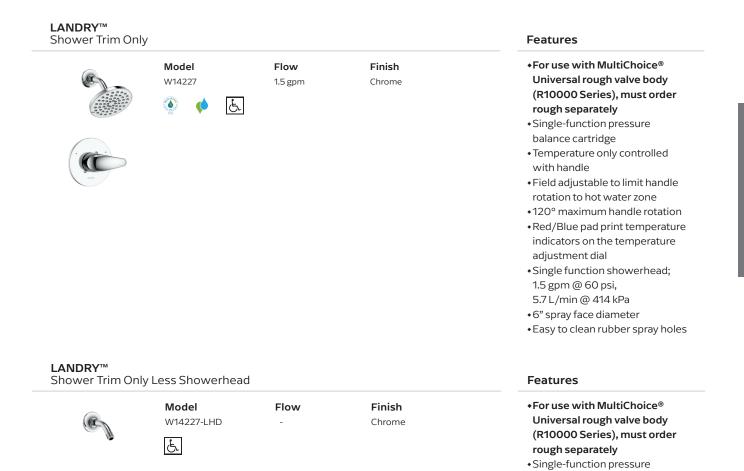



LANDRY™ Single Function Showerhead

	Model	Flow	Finish	 Single function showerhead
	WP14117	1.5 gpm	Chrome	•1.5 gpm @ 60 psi,
00000000				5.7 L/min @ 414 kPa
00000000	🔮 🌔			 6" spray face diameter
5555				• Easy to clean rubber spray holes




CARAQUET™ Single Handle Dee	ck Mount Lavato	ry Faucet		Features
	Model W22216	Flow -	Finish Chrome	
	Coming	Soon		
CARAQUET™ Single Handle Deo	ck Mount Lavator Model W22216-LPU	ry Faucet (Less Poj Flow	p-up) Finish Chrome	Features
	Coming	Soon	Chrome	
CARAQUET™ Escutcheon				Features
0	Model 188F	Flow -	Finish Chrome	• Escutcheon plate with gasket for 3-hole installation



	Model	Flow	Finish	For use with MultiChoice [®]
a	W14218	1.75 gpm	Chrome	Universal rough valve body
e la				(R10000 Series), must order
(SW)	لج 🔌 🔇	کے Valve control only A	DA	rough separately
Egur	Unimetter factory			 Single-function pressure
				balance cartridge
				 Temperature only controlled
				with handle
				• Field adjustable to limit handle
				rotation to hot water zone
TI II				• 120° maximum handle rotation
				Red/Blue pad print temperature
				indicators on the temperature
				adjustment dial
				Slip on SpoutThree spray showerhead:
				• Three spray showerhead: Full Body Spray, Massage Spray
				and Full Spray with Massage
				•1.75 gpm @ 80 psi,
				6.6 L/min @ 552 kPa
				•3.93" spray face diameter
				•Easy to clean rubber spray hole
RAQUET™	l ess Showerhe	ad		Features
b/Shower Trim	LC33 SHOWCHIC			
b/Shower Trim		Flow	Finish	For use with MultiChoice [®]
b/Shower Trim	Model	Flow	Finish	For use with MultiChoice [®] Universal rough valve body
o/Shower Trim	Model W14218-LHD	Flow -	Finish Chrome	Universal rough valve body
b/Shower Trim	Model W14218-LHD	Flow - ntrol only ADA		
b/Shower Trim	Model W14218-LHD	-		Universal rough valve body (R10000 Series), must order
b/Shower Trim	Model W14218-LHD	-		Universal rough valve body (R10000 Series), must order rough separately
b/Shower Trim	Model W14218-LHD	-		Universal rough valve body (R10000 Series), must order rough separately • Single-function pressure
b/Shower Trim	Model W14218-LHD	-		Universal rough valve body (R10000 Series), must order rough separately • Single-function pressure balance cartridge • Temperature only controlled with handle
b/Shower Trim	Model W14218-LHD	-		Universal rough valve body (R10000 Series), must order rough separately • Single-function pressure balance cartridge • Temperature only controlled with handle • Field adjustable to limit handle
b/Shower Trim	Model W14218-LHD	-		Universal rough valve body (R10000 Series), must order rough separately • Single-function pressure balance cartridge • Temperature only controlled with handle • Field adjustable to limit handle rotation to hot water zone
Ib/Shower Trim	Model W14218-LHD	-		Universal rough valve body (R10000 Series), must order rough separately • Single-function pressure balance cartridge • Temperature only controlled with handle • Field adjustable to limit handle rotation to hot water zone • 120° maximum handle rotation
Ib/Shower Trim	Model W14218-LHD	-		Universal rough valve body (R10000 Series), must order rough separately • Single-function pressure balance cartridge • Temperature only controlled with handle • Field adjustable to limit handle rotation to hot water zone • 120° maximum handle rotation • Red/Blue pad print temperature
Ib/Shower Trim	Model W14218-LHD	-		Universal rough valve body (R10000 Series), must order rough separately • Single-function pressure balance cartridge • Temperature only controlled with handle • Field adjustable to limit handle rotation to hot water zone • 120° maximum handle rotation • Red/Blue pad print temperature indicators on the temperature
b/Shower Trim	Model W14218-LHD	-		Universal rough valve body (R10000 Series), must order rough separately • Single-function pressure balance cartridge • Temperature only controlled with handle • Field adjustable to limit handle rotation to hot water zone • 120° maximum handle rotation • Red/Blue pad print temperature



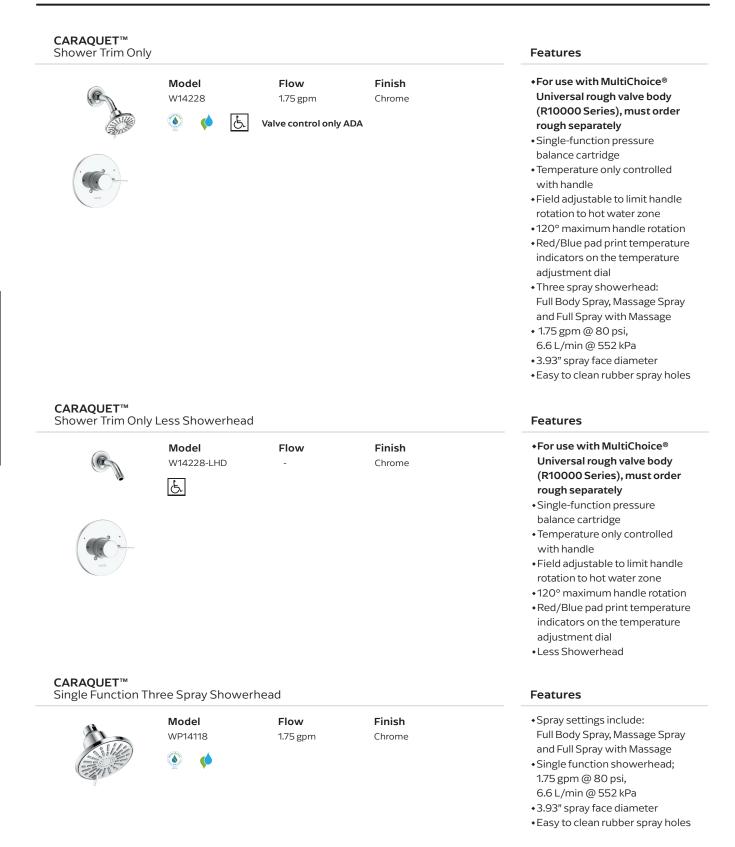

14



How To Order A Complete MultiChoice® Series Tub/Shower Faucet

Rough-In Select desired rough (without cartridge)		+	Trim Select desired trim (with cartridge)	= Complete Faucet
MultiChoice [®] Univ Tub/Shower Rough				Features
	Model R10000-UN R10000-UNBX R10000-UNBXHF R10000-UNWS R10000-UNWS R10000-UNWSHF R10000-UNWSBXT	Case 12 3 3 12 12 12 3	Finish - - - - - - -	 Valve body only Accepts single-function (13/14), dual-function (17), or dual-function thermostatic (17T) cartridge Cartridge ships with trim kit 1/2" universal inlets accept 1/2" copper, 1/2" iron pipe, PEX or CPVC adapters 1/2" universal outlets, inlets/outlets have male threads Back-to-back capability BXT=single box model BXT=single box model, thin wall mounting kit included HF=high flow, shower only applications WS=screwdriver stops, single box model
MultiChoice® Univ Tub/Shower Rough				Features
	Model R10000-IP R10000-IPWS	Case 12 12	Finish - -	 Valve body only Accepts single-function (13/14), dual-function (17), or dual-function thermostatic (17T) cartridge Cartridge ships with trim kit 1/2" female IPS inlets/outlets to accept PEX or CPVC adapters Back-to-back capability WS=screwdriver stops, single box model
MultiChoice® Univ Tub/Shower Rough				Features
	Model R10000-PX R10000-PXWS This valve is designed wit with ASTM F1807 and CS with SDR9 PEX tubing us joining. It cannot be used a PEX reinforcing ring and	A B137.5 and i ing the crimp as a cold expa	s suitable for use ring system of	 Valve body only Accepts single-function (13/14), dual-function (17), or dual-function thermostatic (17T) cartridge Cartridge ships with trim kit 1/2" PEX crimp connections and 1/2" universal outlets with male threads Back-to-back capability WS=screwdriver stops, single box model
MultiChoice [®] Univ Tub/Shower Rough				Features
	Model R10000-MF R10000-MFWS This valve is designed wit ASTM F1960 and CSA B1 PEX tubing using the cold system of joining. It canno joining system.	37.5 and is sui l expansion PE	table for use with EX reinforcing ring	 Valve body only Accepts single-function (13/14), dual-function (17), or dual-function thermostatic (17T) cartridge Cartridge ships with trim kit 1/2" PEX cold expansion connections and 1/2" universal outlets with male threads Back-to-back capability MF=PEX cold expansion connections WS=screwdriver stops single box model

•WS=screwdriver stops, single box model

• Full case quantity restriction on this model - priced each. Please always order in full case. Valve rated at minimum 1.2 gpm (4.5 L/min) for 13/14 series pressure balance; 1.2 gpm (4.5 L/min) for 17 series pressure balance; 1.7 gpm (6.4 L/min) for 17T thermostatic at 45 psi (310kPa).

MULTICHOICE®



A MASCO COMPANY

MASCO CANADA LIMITED 350 SOUTH EDGEWARE RD ST. THOMAS, ON N5P 4L1 1800 567 3300

waltecfaucets.ca